


PORTABLE OUTLET

PORTABLE STORAGE BATTERY


USER MANAUL

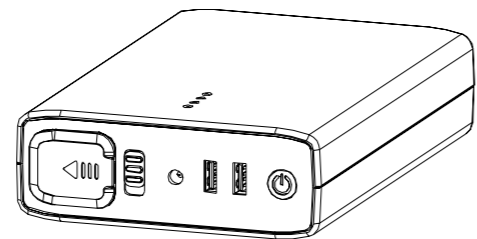


www.PortableOutlet.com
470-297-5778

1

Accessories:



Appearance:

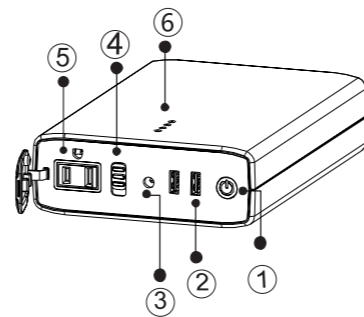


2

1. Reset Button/Power Level Indicator
2. USB Output Port
3. DC Input Port
4. AC Output Switch
5. AC Output Port
6. LED Power Status Display

INSTRUCTIONS FOR USE


Check the Power Level before using:




3

To Charge the Portable Outlet:

1. Slide "AC Output Switch" OFF and plug Power Supply into "DC Input Port".
2. Plug Power Supply into 110V electrical wall outlet.

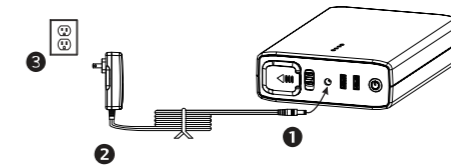


Use the Lighter Plug-In Power Inverter Charging the Portable Outlet:

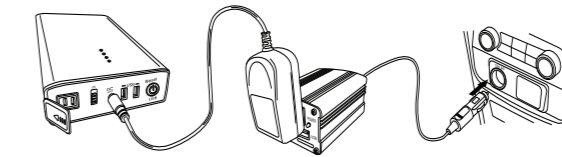


4


1. Plug the Power Inverter DC Plug into a vehicle's cigarette lighter or 12-volt outlet.



2. Make sure the Portable Outlet Power switch is in the OFF position.




3. Plug the Power Supply into the Power Inverter. Warning: Only use the Power Supply provided with your Portable Outlet to charge your Portable Outlet.

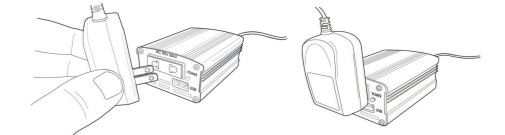

5


To Power Phones & Tablets with USB:

1. Plug USB Cord into "USB Output Port" and into your device. If using the 110V Input, then press the Reset/USB Button.

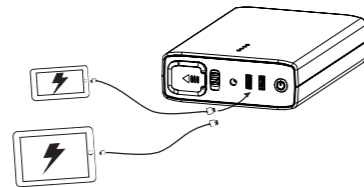

To Power 110V device:

1. Plug device into "AC Output Port".
2. Slide "AC Output Switch" ON.

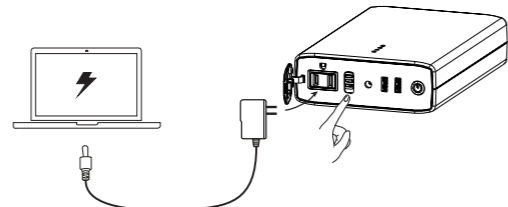

6

Specifications:

Capacity	155Wh
DC Input	16.8V=2A
Output	AC: 110V ~ 60Hz, 100W USB: 5V 4.2A
Working Temperature	14°F ~ 113°F
Charging Temperature	32°F ~ 113°F
Product Size	7.28"L * 4.88"W * 1.69"H
Product Weight	2.11 lbs

AC Adaptor	
Input	AC: 100 ~ 240V 50/60Hz, 1.3A
Output	DC: 16.8V=2A

7

The Rated Output Power is 100W.
The Max. Output Power is 120W.

If the LED lights flash at the same time when powering other devices, slide the "AC Output Switch" OFF and press the Reset Button. Then try powering your devices again.

WARNINGS:

1. Do not drop product.
2. Keep away from liquid.
3. Keep away from flammable/explosive materials.
4. Only use the original Power Supply for charging.
5. Do not disassemble the battery.

8

6. Do not use device below/above stated operating conditions.
7. Please dispose of/recycle properly according to applicable regulations.
8. Charge every 4 months for battery maintenance.
9. Portable Outlet is NOT a back-up battery. Do not attempt to charge the Portable Outlet while powering a device.
10. To extend battery life: When possible, turn off Heated Humidifier and Heated Tube.



12 Month Warranty

9